



## COMMERCIAL FLOORING SOLUTIONS



## UNDERLAYS FOR COMMERCIAL FLOOR



### CL 11<sup>Plus</sup>



**Rapid hardening cementitious self-levelling compound to provide smooth flat level surface.**

- Thickness: 3-10mm thick
- Usable over cementitious substrates, quarry tiles, etc.,
- Underlayment for carpets, vinyl or tiles (after 24hrs) or parquet flooring (after 48hrs)

\* Use suitable primer



### ARDITEX NA



**'Ultra Rapid' setting latex based levelling and smoothing compound with no ammonia. Provides flexible and moisture resistant flat surface.**

- Thickness: Feather edge to 15mm neat (up to 30mm with aggregates)
- No primer required
- Usable over cementitious substrates, ceramic tiles, bitumen and plywood, including steel floors
- Underlayment for resilient floorcoverings (after 4hrs) and ceramic tiles (after 24hrs)



## OVERLAY FOR INDUSTRIAL FLOOR



### K 180<sup>Plus</sup>



**High strength, Rapid hardening self-levelling compound.**

- Thickness: 3-10mm neat
- For heavily trafficked industrial floors (production workshops, warehouses)
- Underlay for Epoxy & PU coatings

\* Use suitable primer





## FLOORING ADHESIVES



Usage of vinyl, LVT, rubber & carpets have become common owing to its superior performance and easy maintenance.

ARDEX flooring adhesives are fully compatible with all types of resilient flooring. They range from pressure sensitive to tackifiers to conductive to heavy duty adhesives. They are durable & applicator friendly adhesive with very low odour and low emission levels.

### ARDEX AF 148



**Dispersion based adhesive for laying LVT, PVC and VCT floorings in sheets, tiles, planks and carpet tiles on internal levelled subfloors**

- Single component
- Very fast drying time
- Used as semi-wet and pressure sensitive
- Extra-long tack for carpet tile installation

### ARDEX AF 825



**Water-based, low odour, solvent free acrylic, emulsion-based floor covering tackifier.**

- Single component
- High temperature resistance
- Suitable for raised access flooring
- For carpet tiles with bitumen, felt, fleece and PVC/PUR backings

### ARDEX AF 2575



**Single component heavy duty, solvent free, low odour, wet bond MS Polymer based adhesive.**

- For all types of LVT, sheet floor coverings, artificial grass in interior and exterior
- Moisture, weather and water resistant
- High temperature resistance, for use in areas of direct sunlight

## POLYMER SCREEDS

**Polymer screeds are used to raise the floor level, obtain wear / abrasion resistant surface and to provide strong base as bonded or un-bonded screed.**

- No water curing necessary
- Tested: BS 8204, DIN 18560 & EN 13813
- BRE Screed Test: Category A
- Walkable after 8hrs, tiling after 24hrs and stone /carpet installation after 7days

\* Use suitable primer

### A 3



Screed concrete needs to be mixed with cement, sand and water.


### A 37



Pre-bagged screed needs to be mixed with sand and water.



## FLOOR HARDENER

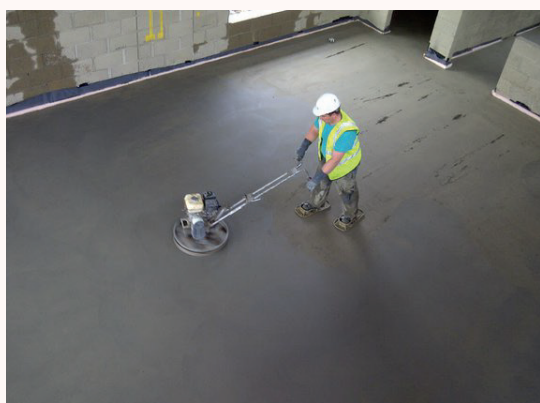

**Non-metallic dry shake floor hardener applied over green concrete provides high durable wear resistant floor top.**


### FH 20



- Hard wearing and abrasion resistant
- MOH'S Scale 7 - 8
- For heavy traffic floors @ loading bays, garages, ware-houses & mechanical workshops



## ANCILLARY PRODUCTS

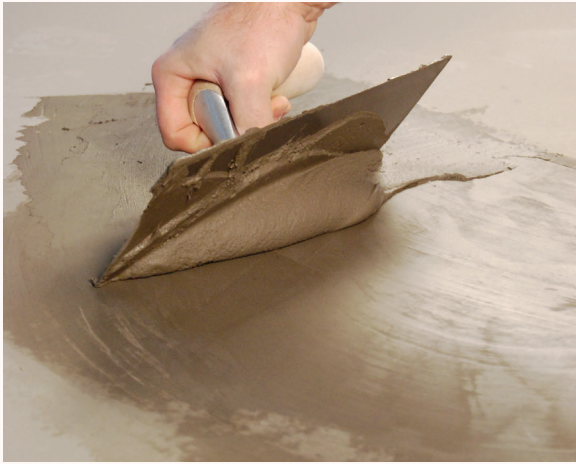

### FEATHER FINISH



**Rapid drying, patching and smoothing compound.**

- Floor covering after 15 min
- Cost effective
- Ideal for patching or feather finishing of day-work joints, uneven trowel marks
- Exceptional bond to plywood, concrete, smoothing compounds, terrazzo and ceramic tiles



### A 45



**Cementitious rapid drying & hardening internal repair mortar.**

- Applicable @ featheredge to 10mm thick
- No water curing
- Rapidry formula: Receives finishes after 90 mins
- For horizontal, vertical and overhead repairs



## VALUED CLIENTELE



accenture



Google

SAMSUNG



Microsoft



amazon

J.P.Morgan



**ARDEX ENDURA (INDIA) PRIVATE LIMITED**  
an ISO 9001:2015 & ISO 14001:2015 certified company

Corporate & Regd. Office: Unit No. 406 & 407, "Brigade Rubix" No. 20, HMT Campus, Yeshwanthpur Hobli, Bengaluru - 560013.

CIN No: U24233KA1997PTC022383 Tel: +91 80 66746500 Email: [customercare@ardexendura.com](mailto:customercare@ardexendura.com) Website: [www.ardexendura.com](http://www.ardexendura.com)

Branches

AHMEDABAD: +919824019132 • AURANGABAD: +918605445577 • BENGALURU: +919972922333 • BHUBANESHWAR: 0674 - 2578101 • CALICUT: 0495 - 2740334 • CHENNAI: 044 - 42805544 • DELHI: +919810603431  
ERNAKULAM: 0484 - 2341044 • GOA: 0832 - 2750992 • GUWAHATI: +917896002188 • HUBBALLI: 0836 - 2970505 • HYDERABAD: +919703250099 • INDORE: 0731 - 4021148 • JAIPUR: 0141 - 2392993 • KOLKATA: +919831071084  
LUCKNOW: 0522 - 4043251 • LUDHIANA: 0161 - 2532170 • MANGALURU: 0824 - 2442176 • MUMBAI: 022 - 65133299 • MYSURU: 0821 - 2570171 • NAGPUR: +919822223743 • PUNE: +919881249292  
RAIPUR: 0771 - 4038300 • SALEM: 0427 - 2211454 • TRICHY: 0431 - 6454649 • VIJAYAWADA: +918688354587 • VISAKAPATNAM: 0891 - 6469499