

# CPS 30 ED

## Polyurethane based, UV stable, Car Park Protection system for external decks

### DESCRIPTION

CPS 30 ED is a tough, durable, UV stable, polyurethane car park protection system providing a seamless, wear resistant, profiled surface to external decks of multi-story car parks. CPS 30 ED is available in various colours, providing aesthetics and demarcation of different areas.

### USES

- Exposed car park decks & ramps
- Engineering Works
- Loading Bays

### FEATURES

- Seamless & watertight
- UV stable
- Anti skid
- Hard wearing: extremely durable and abrasion resistant with low maintenance cost
- Resistant to a general and vehicle related chemicals spillages
- Supplied in pre-measured packs for ease of mixing and consistency at site
- Aesthetically attractive: Available in range of colours


### PHYSICAL PROPERTIES

CPS 30 ED @ 27 ± 1°C

Walkability	24 hours
Vehicular Traffic	5 days
Full Cure	7 days
Water Absorption	Nil
Slip Resistance	Good
Abrasion Resistance	Good
Bond Strength	>1.5 MPa
UV Light Resistance	Good

### SYSTEM BUILD-UP

Build-up	Product	Consumption	
		Driveways & parking (DFT : 1.1mm)	Ramps (DFT : 1.6mm)
Primer	R 140 CP	0.225 kg/m <sup>2</sup>	0.225 kg/m <sup>2</sup>
Base Coat	R 50 CP	0.4 kg/m <sup>2</sup>	0.4 kg/m <sup>2</sup>
Slip Resistance	R 130 C	0.6 kg/m <sup>2</sup> (Type 1)	1.0 kg/m <sup>2</sup> (Type 2)
Wear coat	R 50 CP	-	0.5 kg/m <sup>2</sup>
Top Coat	R 69 CP	0.13 kg/m <sup>2</sup>	0.15 kg/m <sup>2</sup>

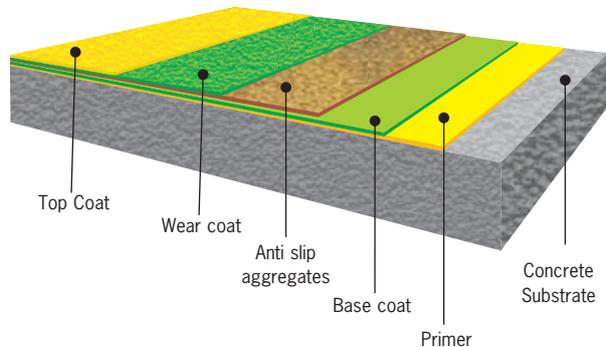

### APPLICATION INSTRUCTIONS

Installation of CPS 30 ED should be carried out only by an approved applicator of ARDEX ENDURA.

#### Surface Preparation

Note: The concrete substrate should have a surface tensile strength of at least 1.5 N/mm<sup>2</sup> and should be minimum 28 days old.

The concrete substrate must be hard, sound, free of dust and other barrier materials such as mortar, curing agents, laitance, oil, grease, etc. that will inhibit adhesion to the substrate. Overwatered or otherwise weak concrete surfaces must also be suitably prepared down to sound, solid concrete by mechanical methods. Dust and other debris should be removed using vacuum equipment.

The ideal substrate for application is a flat, lightly textured, clean concrete surface. Surface irregularities must be ground down or filled out with ARDEX ENDURA range of repair materials. Concrete surfaces should be mechanically prepared, either by scarifying, scabbling, grinding, contained shot blasting or similar, and be vacuum cleaned.

**Note:** The surface moisture content should be less than 5% before commencement of the work. The coating should not be applied to floors that are known to have rising moisture. The product should not be applied in temperatures less than 10°C or where the ambient relative humidity is greater than 85%.

#### Priming

Mix and apply a coat of R 140 CP using a roller or brush on the prepared surface. Allow it to dry for 12 hours

#### Base Coat

Mix and apply R 50 CP using a roller or brush on the primed surface. Whilst the coat is still wet, broadcast R 130 C anti-slip aggregates. The excess aggregates should be removed after 12 hours by brushing or vacuuming.

#### Wear Coat in case of ramps

Mix and apply R 50 CP using a roller or brush on the dried base coat. Allow the coating to dry for 12 hours.

# CPS 30 ED

Polyurethane based, UV stable, Car Park Protection system for external decks

## Top Coat

Mix and apply R 69 CP using a roller or brush on the dried base coat (in driveways & parking) or dried wear coat (on ramps) and allow it to dry for 24 hours before lane marking and stenciling is done with R 69 CP. The floor can be subjected to foot traffic after 24 hours and vehicular traffic after 5 days.

## MAINTENANCE

Good housekeeping and regular cleaning is essential in order to maintain the performance of CPS 30 ED. It is particularly important in areas that are subject to regular spillage of chemicals. Spillages should not be allowed to dry, which results in higher concentrations of the chemicals, causing early failure. Regular cleaning of the surface with a rotary scrubbing machine in conjunction with a water miscible cleaning agent or hot water washing at temperatures up to 50°C is recommended.

## PRECAUTIONS

During mixing and application the following precautions should be observed: Ensure adequate ventilation and avoid contact of the material with the eyes, nasal passages, mouth and unprotected skin. Avoid contact with the hands by wearing protective gloves and by using, if necessary, a suitable barrier cream. In case of contact with the eyes, rinse immediately with plenty of water and seek medical advice and after contact with the skin wash immediately with plenty of soap and water. Prolonged contact with the skin should be avoided, especially where the user has an allergic reaction to resin-based materials. Always wear gloves and eye/face protection as necessary. Observe personal hygiene, particularly washing the hands after work has been completed or at any interruption whilst work is in progress. Care should be taken when removing gloves to avoid contaminating the insides. In case of accidents seek medical advice.

## STORAGE AND SHELF LIFE

Please refer storage and shelf life of individual products within the CPS 30 ED system.

## DISPOSAL/SPILLAGE

Spillage of any of the product components should be absorbed onto sand or other inert materials and transferred to a suitable disposable vessel. Disposal of such spillage or empty packaging should be in accordance with local waste disposal authority regulations.

For further information please refer to the individual Material Safety Data Sheet.

## CONDITIONS OF SALE

Sold subject to the Company's conditions of sale which are available on request.

## NOTE

The information supplied in this datasheet is based upon extensive experience and is given in good faith in order to help you. Our Company policy is one of continuous Research and Development; we therefore reserve the right to update this information at any time without prior notice. We also guarantee the consistent high quality of our products. However, as we have no control over site conditions or the execution of the work, we accept no liability for any loss or damage which may arise as a result thereof.



## ARDEX ENDURA (INDIA) PRIVATE LIMITED

an ISO 9001:2008 certified company  
Corporate Office & Regd. Office: Unit No. 406 & 407,  
"Brigade Rubix" No. 20, HMT Campus,  
Yeshwantpur Hobli, Bengaluru - 560013.  
CIN No: U24233KA1997PTC022383 Tel: +91 80 66746500  
Email: [customercare@ardexendura.com](mailto:customercare@ardexendura.com)  
Website: [www.ardexendura.com](http://www.ardexendura.com)

## Branches

• AHMEDABAD	079 26425310	• HUBBALLI	0836 2970505	• PATNA	+919934687909
• AURANGABAD	+918888480847	• HYDERABAD	040 27650293	• PUNE	020 64781879
• BENGALURU	080 40912934	• INDORE	0731 4021148	• RAIPUR	0771 6539055
• BHUBANESHWAR	0674 2421901	• JAIPUR	0141 2392993	• SALEM	0427 2211454
• CALICUT	0495 2740334	• KOLKATA	033 65090604	• SHIVAMOGGA	+919880605770
• CHENNAI	044 42805544	• LUCKNOW	0522 4043251	• TRICHY	0431 6454649
• DELHI	011 26802949	• LUDHIANA	0161 2532170	• TRIVANDRUM	0471 2558648
• ERNAKULAM	0484 2341044	• MANGALURU	0824 2442176	• VIJAYAWADA	+918688354587
• GHAZIABAD	0120 6541564	• MUMBAI	022 65133299	• VISAKAPATNAM	0891 6469499
• GOA	0832 2750992	• MYSURU	0821 2570171		
• GUWAHATI	+917896002188	• NAGPUR	+919822223743		